

標準電機有限公司 220台北縣板橋市四維路106號 TEL:(02)2256-3125 FAX:(02)2255-6352 E-mail:sales@sew.com.tw

數位高壓絕緣表 DIGITAL H.V. INSULATION TESTER



- 微處理器控制設計。
- 大型的液晶顯示器。
- 量測範圍最高可到: 2803 IN-5kV。
 2804 IN-10kV。
- 外來電壓輸入時,蜂鳴器會響應,也會顯示在液晶顯示器上。
- 測試電壓作類比刻劃顯示。
- 自動換檔。
- 自動關機。
- 測試時間在液晶顯示器上顯示,最長可到99.9秒。
- 符合EN 61010-1, IEC 1010-1 CAT Ⅲ。

電氣規格(23±5°C ≦ 80%RH)

2803 IN

						LUU					
量測檔位	0.5kV	1kV	2.5kV	5kV	1kV	2.5kV	5kV	10kV			
量測範圍 (自動換檔)	0-25GΩ	0-50GΩ	0-125GΩ	0-250GΩ	0-50GΩ	0-125GΩ	0-250GΩ	0-500GΩ			
準確度	0-50GΩ:±3%讀值				0-50GΩ: <u>±</u> 3%讀值						
	50-2500	$\Omega : \pm 5\%$	讀值		50-500GΩ:±5%讀值						
使用電池	1.5V(AA)*8(顆)										
外形尺寸	170(長)*120(寬)*95(高)公厘										
重量	約 970 克(含電池) 約 1030 克(含電池))					
附件	測試線*1(組)										
	說明書*1(本)										
	肩帶*1(條)										
	電池										

http://www.51082245.com/sew.htm

2804 IN

Test & Measuring Instruments

DIGITAL H.V. INSULATION TESTER



FEATURES

- Microprocessor controlled with advanced safety features.
- Displays and sound warning if external voltage is present.
- Battery life extended by Enersave[™] feature.
- Continuous battery monitoring.
- Auto-ranging/auto-off.
- Built-in carrying case, test leads in separate pouch.
- Real-time bargraph display of test voltage and voltage decay during discharge.
- Audible and visual message displayed if external voltage is present.
- Large LCD.

SPECIFICATIONS

2803 I N


- Display can be customized for special orders.
- Show test time duration (up to 99.9s) for easy comparison.
- EEPROM calibration.
- EN61010-1 IEC 1010-1 CAT III

Test Leads Connections



Test Voltage (DC V)	0.5KV	1KV	2.5KV	5KV			
Measuring Ranges (Auto-Ranges)	0-25GΩ	0-50GΩ	0-125GΩ	0-250GΩ			
Accuracy	0-50G Ω :±3% of reading 50-250G Ω :±5% of reading						
Dimensions	170(L)×120(W)×95(D)mm						
Weight (Battery Included)	930g Approx.						
Power Source	1.5V (AA)×8 Batteries						
Accessories	Test leads Shoulder belt Instruction manual Batteries						

Test leads

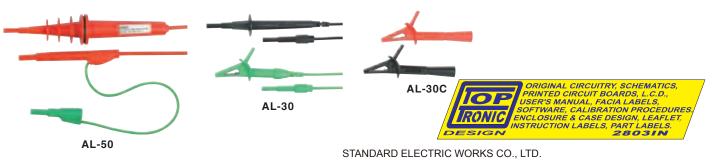

5F.,NO.105, Jhongcheng Rd., Tucheng Dist., New Taipei City 23674, Taiwan (R.O.C) TEL: 886-2-22681528 FAX: 886-2-22681529

http://www.51082245.com/sew.htm